

# HSF

**NOTES:**


- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

## Ordering Information

3143-XX S XX B K00 X 1

No. of Pins	Contact Plating	Color	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold	W=White	
16 44	G4=15u"Gold		
20 50	G5=30u"Gold		
24 60	S0=Gold Flash/Tin		
26 64	S3=10u"Gold/Tin		
30 80	S4=15u"Gold/Tin		
100	S5=30u"Gold/Tin		
	SN=Tin		

Item	Pitch	Mating
Standard	1.27X2.54	5242
Alternate		

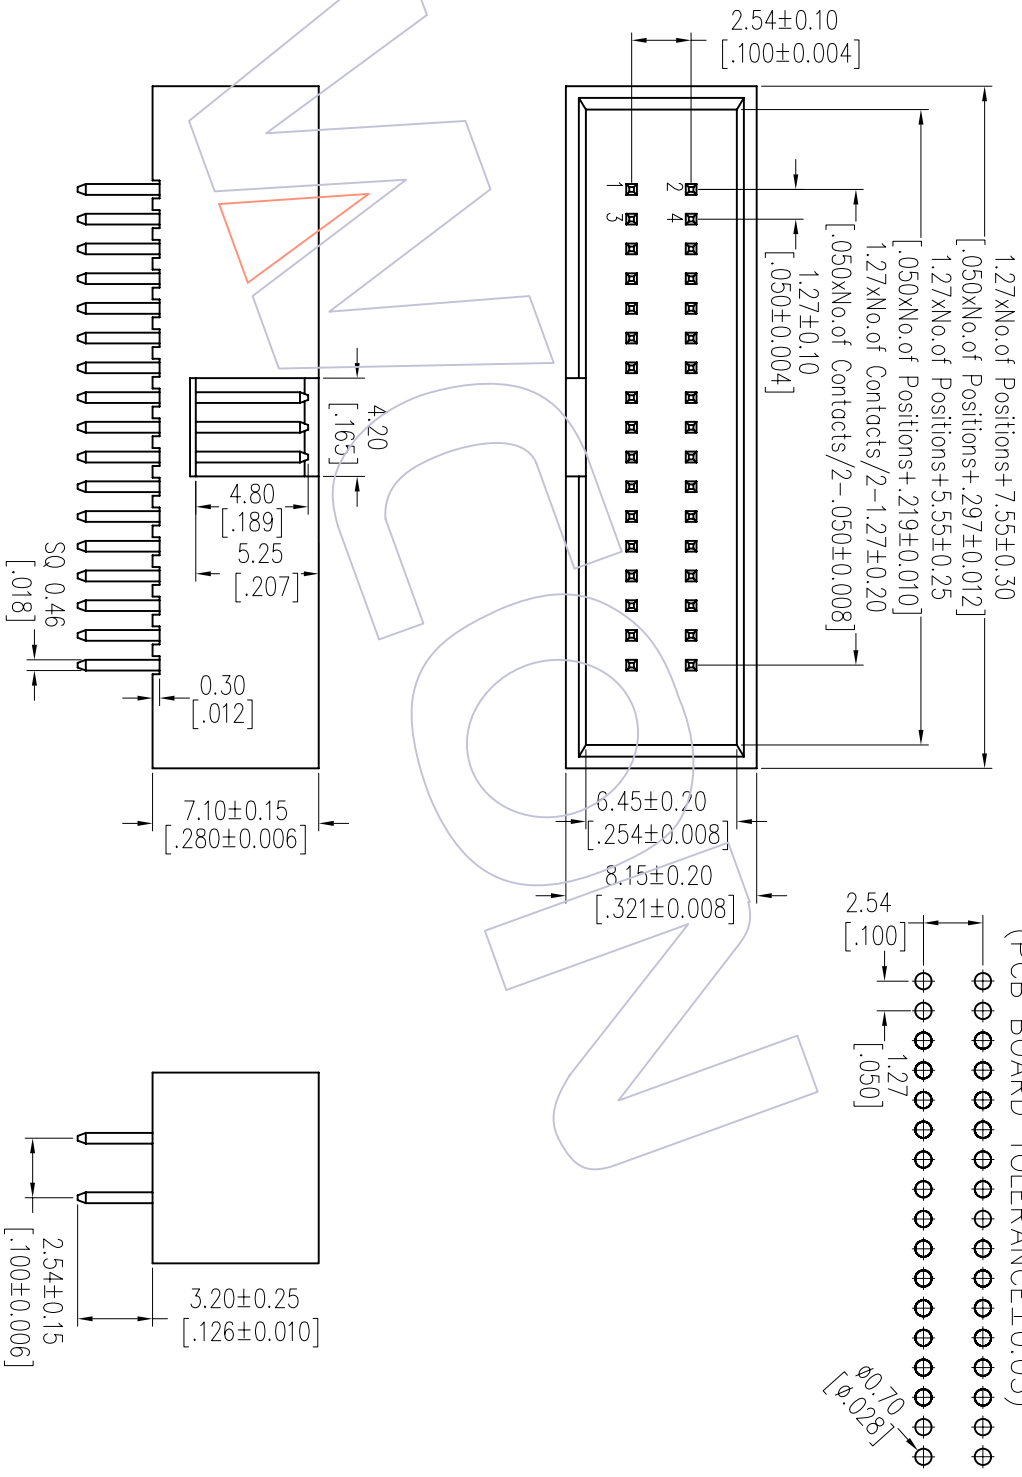

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/09/18	NEW		XX	JYHuong	2012/09/18	mm	A4	3143-XXSXXBK00X1	1.27*2.54 BOX HEADER 180° H=7.10	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	SHEET	PROJ.	APPROVE	DATE		
				± 3'			1/1					

# WCON

Http: www.wcon.com