
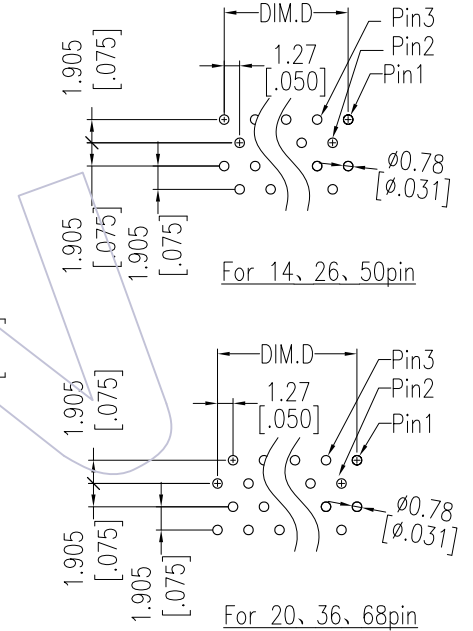


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 500MΩ Min
Operation Temperature: -65°C to +125°C

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0

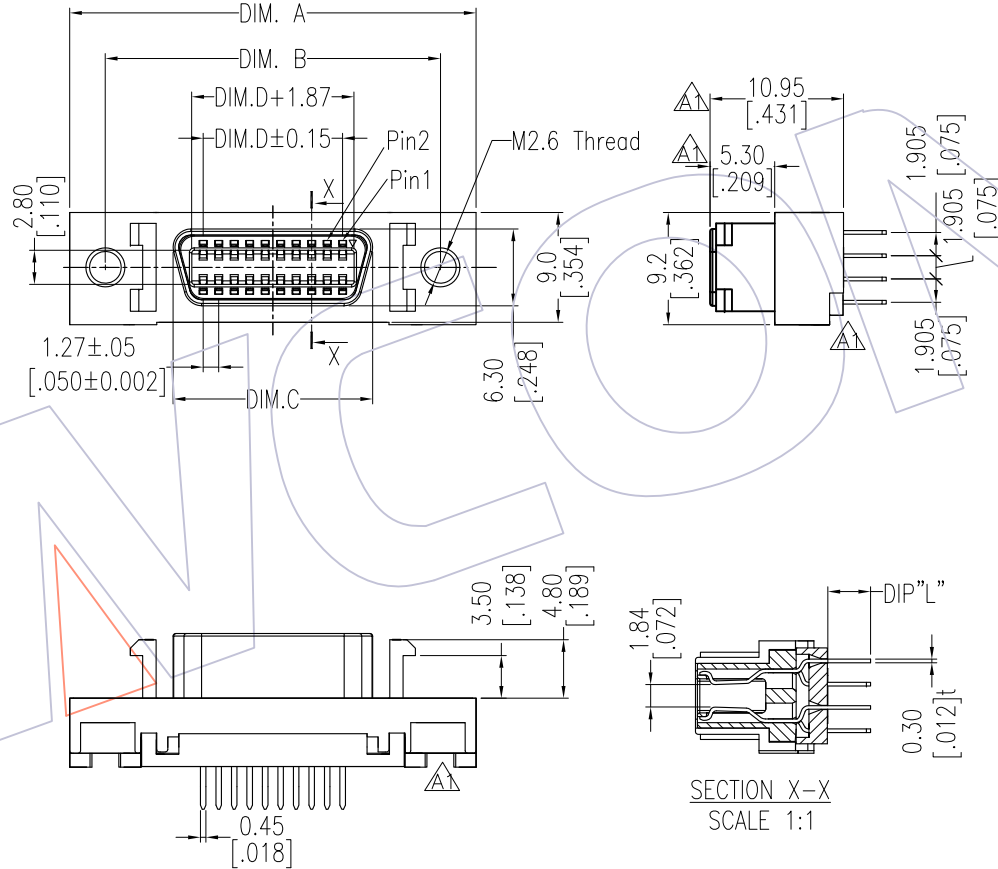

Ordering Information

6321- XXX S D XX M N X 0X

No.of Pins	Contact Plating	Packing
14 36	S1=3u"Gold/Tin	A:Tray
20 50	S2=5u"Gold/Tin	
26 68	S3=10u"Gold/Tin	
	S4=15u"Gold/Tin	
	S5=30u"Gold/Tin	

Part No.	DIP L
6321-XXXSDXXMNX01	3.10
6321-XXXSDXXMNX02	3.50

68	63.88	57.93	46.91	41.91	53.65
50	52.45	46.50	35.48	30.48	42.22
36	43.70	37.63	26.59	21.59	33.37
26	37.13	31.28	20.24	15.24	27.18
20	33.32	27.47	16.43	11.43	23.37
14	29.51	23.66	12.62	7.62	19.56
POS.	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Surong Xu	2017/02/17	UNIT	mm	6321-XXXSDXXMNX0X
A1	2017/02/17	modify	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2013/12/30	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.27PITCH CEN 180° TYPE SCSI FEMALE
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com