

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2150 - 1 XX W XX CUNT X


No. of Pins per ROW: 42-40PIN
 Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
 SO=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin
 SN=Tin, SM=Matte Tin

Packing: T=Tube
 Series No. 1=TYPE 1, 2=TYPE 2

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A1	2014/05/03	Modify drawing
A0	2012/08/04	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	Wang	2014/05/03	mm		SBE TABLE
XX	CHECK	DATE	SIZE	A4	TITLE: FI12.54 SINGLE ROW Centipede H=5.0
X.XXX	± 0.15	DATE	SHEET	1/1	Customer NO.
Angle	± 3'	APPROVE	PROJ.		
DIM	TOL				

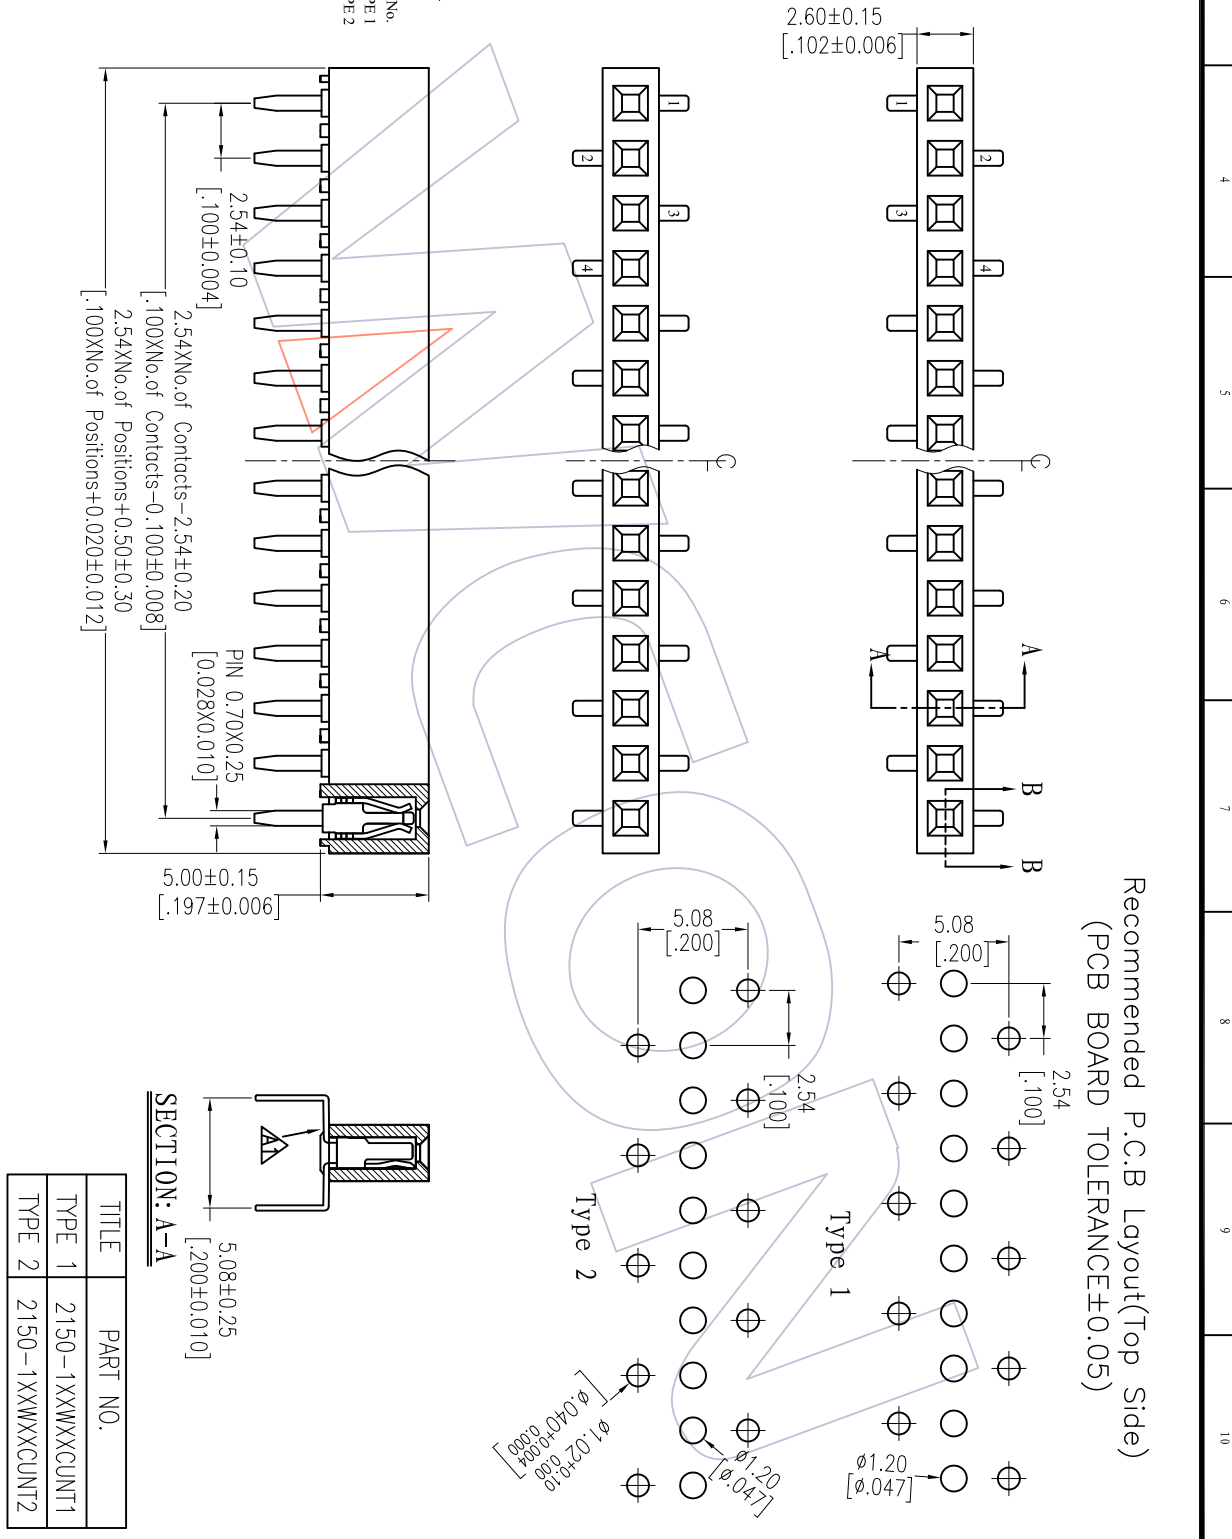

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

TITLE	PART NO.
TYPE 1	2150-1XXWXXCUNT1
TYPE 2	2150-1XXWXXCUNT2