



# HSF

**NOTES:**

Current Rating: 2.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au over Ni  
 Insulator Material: PA9T+33%GF UL94V-0

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE ±0.05)

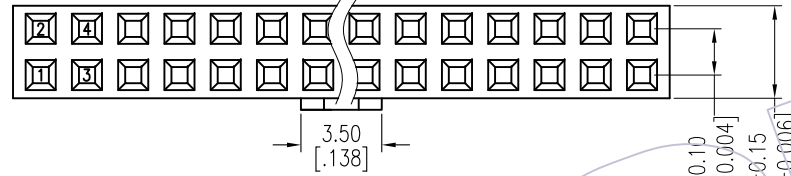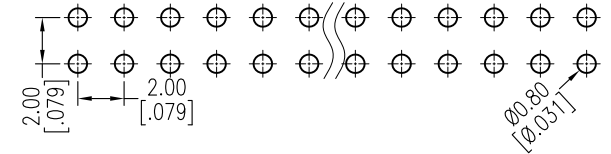



## Ordering Information

**2243NC-2 12 S G0 CUN T 2**

No. of Pins per Row: 12Pin

Contact Plating: G0=Gold Flash

Packing: T=Tube

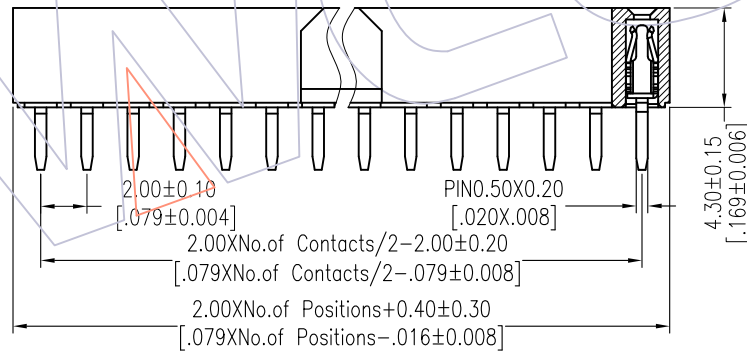

OPERATION		DRAW	DATE	SCALE	FIT
x.x	±0.40	Surong Xu	2017/03/06	UNIT	mm
x.xx	±0.25	CHECK	DATE	SIZE	A4
x.xxx	±0.15	APPROVE	DATE	SHEET	1/1
Angle	± 3'			PROJ.	☉
DIM	TOL				

PART NO.	2243NC-212SGOCUNT2
TITLE:	FH2.00 DUAL ROW 180° H=4.3 W=4.0 防浸锡端子
Customer NO.	K1464

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2017/03/06	NEW	-----