
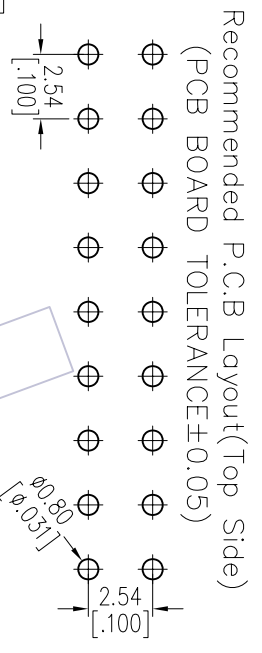


HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000V_{RMS}
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

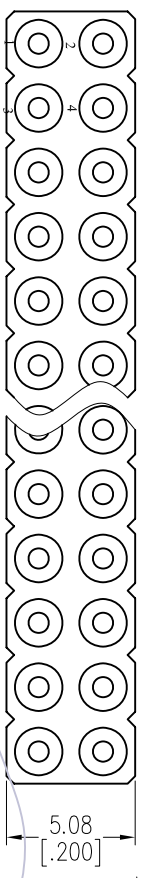



Sleeve: Brass CuZn36Pb3(C360000)
 Contact plating: Au over Ni
 Connecting Pin: Ø0.47mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3510-302 XX S XX 124 X 1

No. of Pin
 2-50PIN
 Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

Packing
 A=Tray
 T=Tube

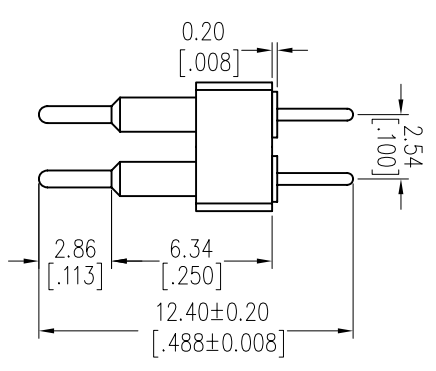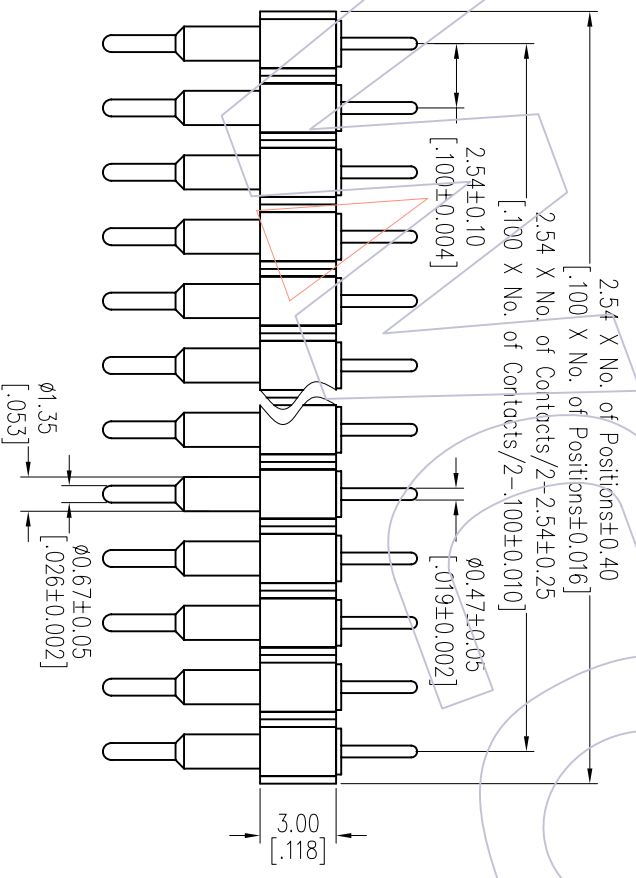

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/10/22	UNIT	mm	3510-302XXSXX124X1
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.25		1/1		2.54mm MACHINED PIN HEADER
Angle	±0.15	DATE	PROJ.		DUAL ROW 180° H=3.00 L=12.4
APPROVE	DATE	DATE	Customer NO.		
CHANGE	DIW	TOL			
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/10/22	NEW			
1					

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com