


HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1500V AC
 Insulation Resistance: 5000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PBT+30%GF UL94V-0


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

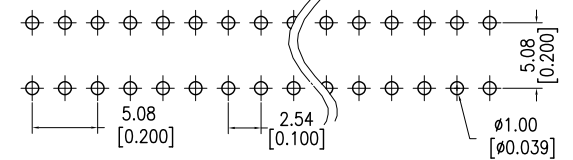

Ordering Information

7512-XXX X X X X 01

Pins
 S=180° DIP
 R=90° DIP
 C=Splint
 Color
 Insulator

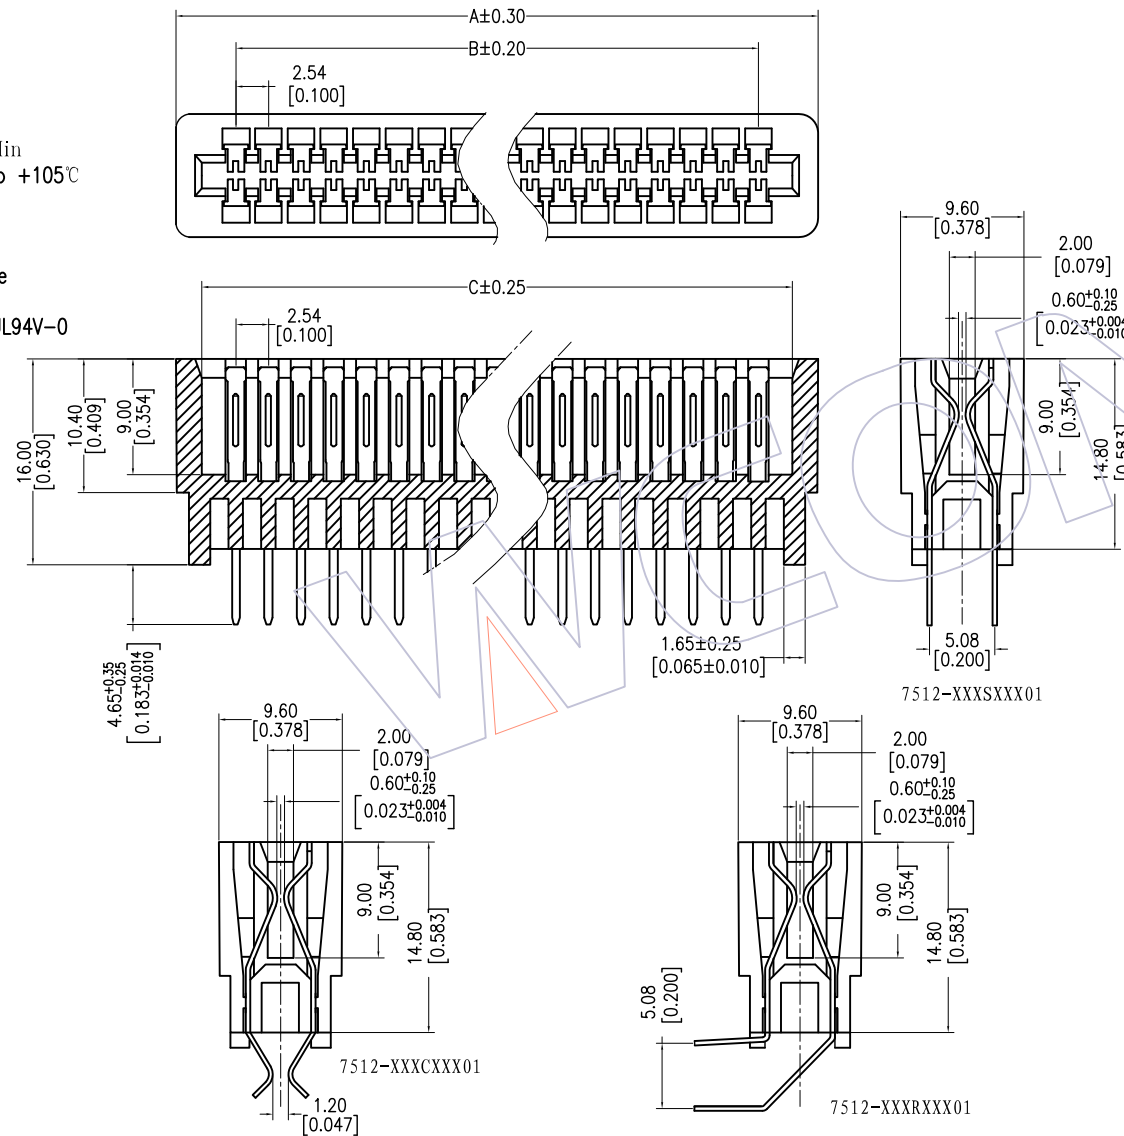

IMENSION LIST

NO. OF POSITIONS	IMENSION LIST			NO. OF POSITIONS	IMENSION LIST		
	A	B	C		A	B	C
6P	14.42	5.08	10.42	64P	75.38	86.04	71.30
8P	18.96	7.62	13.96	80P	77.92	88.58	73.84
10P	19.50	10.16	15.50	88P	80.46	71.12	76.48
12P	23.04	12.70	18.04	80P	83.00	73.66	78.00
14P	24.58	15.24	20.58	88P	85.54	76.30	81.54
16P	27.12	17.78	23.12	84P	88.08	78.74	84.08
18P	28.66	20.32	25.66	86P	90.62	81.38	86.62
20P	32.20	22.86	28.20	88P	93.16	83.92	89.16
22P	34.74	25.40	30.74	70P	95.70	86.36	91.70
24P	37.28	27.94	33.28	72P	98.24	88.90	94.24
26P	38.82	30.48	35.82	74P	100.78	91.44	96.78
28P	42.36	33.02	38.36	76P	103.32	93.98	99.32
30P	44.90	35.56	40.90	78P	105.86	96.52	101.86
32P	47.44	38.10	43.44	80P	108.40	99.06	104.40
34P	48.98	40.64	45.98	82P	110.94	101.60	106.94
36P	52.52	43.18	48.52	84P	113.48	104.14	109.48
38P	55.06	45.72	51.06	86P	116.02	106.68	112.02
40P	57.60	48.26	53.60	88P	118.56	109.22	114.56
42P	60.14	50.80	56.14	90P	121.10	111.76	117.10
44P	62.68	53.34	58.68	92P	123.64	114.30	119.64
46P	65.22	55.88	61.22	94P	126.18	116.84	122.18
48P	67.76	58.42	63.76	96P	128.72	119.38	124.72
50P	70.30	60.96	66.30	98P	131.26	121.92	127.26
52P	72.84	63.50	68.84	100P	133.80	124.46	129.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2014/10/28	NEW		X.X ±0.40	Allen	2014/10/28	mm	A4	7512-XXXXXXX01
				X.XX ±0.25	CHECK	DATE	inch		TITLE: PCI SLOT
				X.XXX ±0.15	APPROVE	DATE	1/1		180° DIP/90° DIP/Splint
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--