

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 10mΩ, Max
 Withstand Voltage: 1000V AC/DC
 Mechanical Life: Min 100 cycles
 Connecting Pin: $\phi 0.47$ mm
 Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F UL94V-0
 24P~32P Insulators with center one bar
 36P~48P Insulators with center two bar

Ordering Information

3560-302 XX S XX 100 X 1

Row of Pitch No. of Pin Contact Plating Packing
 2=15.24mm See tab G0=Gold Flash T=Tube
 G3=10ur"Gold A=Tray
 G4=15ur"Gold
 G5=30ur"Gold

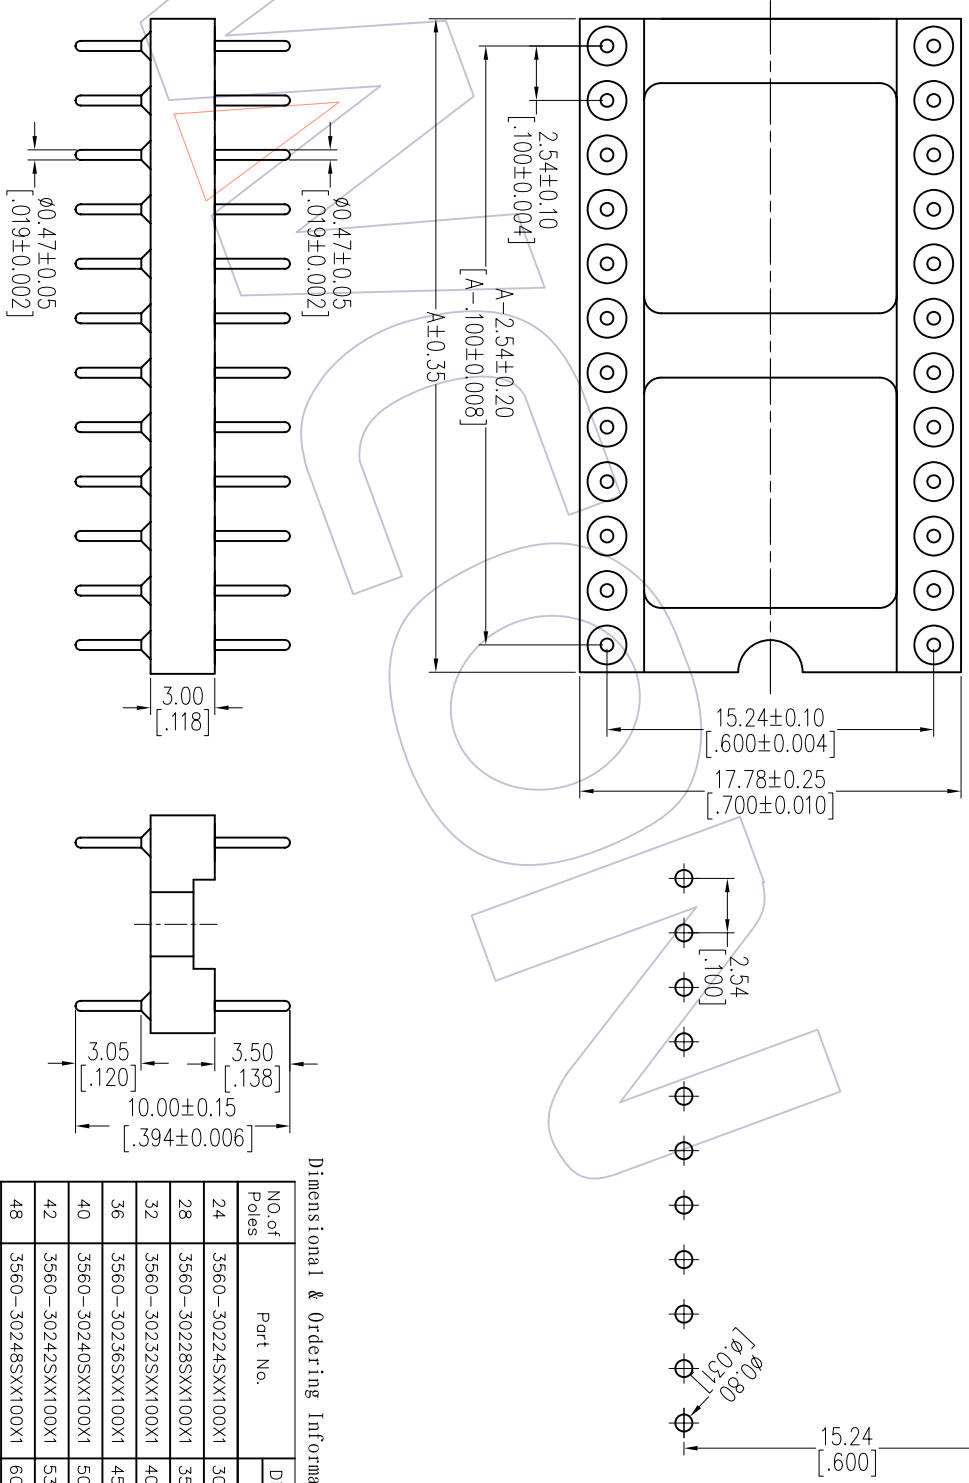

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
24	3560-30224SX100X1	30.48
28	3560-30228SX100X1	35.56
32	3560-30232SX100X1	40.64
36	3560-30236SX100X1	45.72
40	3560-30240SX100X1	50.80
42	3560-30242SX100X1	53.34
48	3560-30248SX100X1	60.96
50	3560-30250SX100X1	63.50
52	3560-30252SX100X1	66.04

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/11/05	NEW		X.XX	JYHuog	2012/11/05	mm	A4	SEE TAB
				X.XXX	CHECK	DATE	SHEET	1/1	TITLE:
				Angle	APPROVE	DATE	PROJ.		2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=10.0 Row of Pitch 15.24
				± 3'					Customer NO.